


Installation Guidelines


NOVADISPLAY®
INNOVATIVE DISPLAY SOLUTIONS

6mm Rod Display Systems

800.753.9688 • www.novadisplay.com

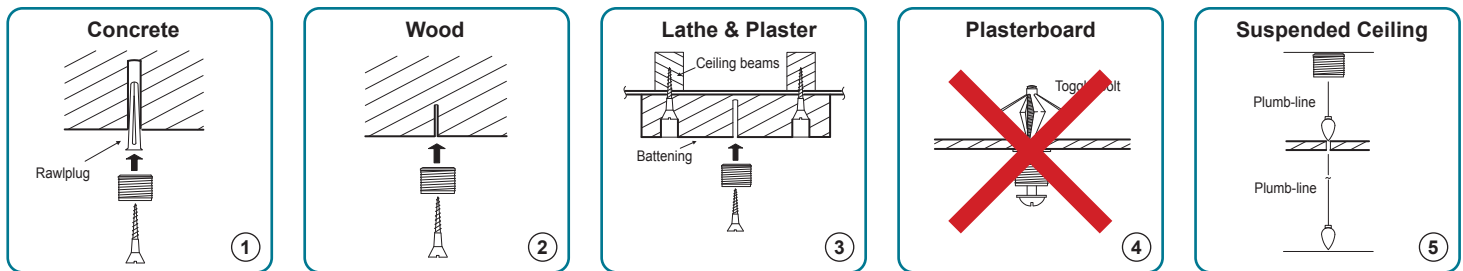

***** DO NOT INSTALL INTO PLASTERBOARD (DRYWALL) CEILINGS OR WALLS IF YOUR APPLICATION INCLUDES GLASS SHELVING OR OTHER HEAVY ITEMS.**

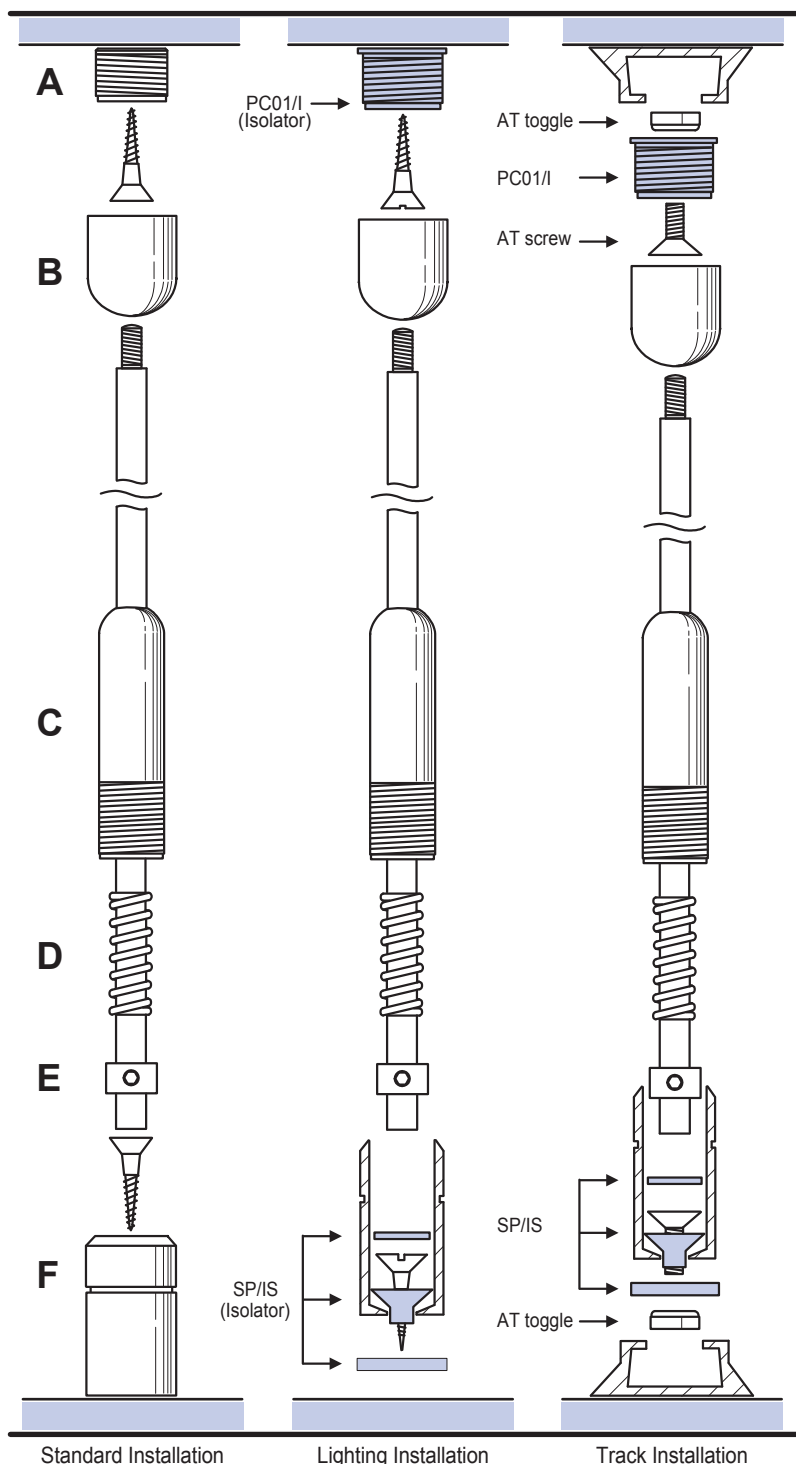

Top to Bottom (RAS) - Rod Installation

IMPORTANT: It is essential to check that the top ceiling fixings are strong enough to take the weight of the items being displayed while allowing for tension in the rods.

Isolators must be used where power is required through the rods (lighting etc.), and fixings are into metal, or conductive materials. Remember to replace the top brass fitting with the plastic **PR01/I** isolator and add bottom isolator **SP/IS** to bottom fitting.

- 1) Affix fitting (A) to ceiling:
 - for wooden ceilings use a wood screw.
 - for cavity ceilings use a spring toggle bolt.
 - for solid ceilings use a rawlplug and screw.
- 2) Screw part (B) into part (A). This has a left hand thread.
- 3) Using a plumb-line; descend from (A), and fix floor fitting (F) to floor using appropriate type of fixing.
- 4) Screw rod into top fitting (A) using a left hand thread, and add as many additional rods as required.
- 5) Cut bottom rod in line with the decorative line around floor fitting (F).
- 6) Slide tensioner (C), spring (D), and rod grip (E) onto the rod. Tighten grip (E) to the end of the rod with allen key provided.
- 7) Adjust the tension of the rod by screwing tensioner (C) into floor fitting (F). See (G) below.

NOTE: It is important to check the strength of the top fixing(s). NOVADISPLAY® takes no responsibility for incorrect installation. This responsibility rests with the installer.

If using lighting on rods, we recommend that you use isolators (see illustration) at the top and bottom.

Rods are not supplied with fixing screws.

