



NOVADISPLAY™
INNOVATIVE DISPLAY SOLUTIONS

1. Product Name

■ Nova Display MR Series Versa-Module Display Stands

2. Manufacturer

Nova Display Systems, Inc.
1626 Piner Road
Santa Rosa, CA 95403

Phone: 800-753-9688
Fax: 800-753-0856

E-mail: enquiries@novadisplay.com
Website: www.novadisplay.com

3. Product Description

Nova Display's Versa-Module is a compact, lightweight floor display stand that supports individual acrylic frames (pockets) designed to display various size documents, prints, posters, photos, brochures, signage, and much more. Suspended cables are fixed into an attractive aluminum profile system that gives maximum flexibility to create unique presentations.

Acrylic pockets can be positioned at any height, and used to create single or double sided displays. In addition, the stand can have logo and graphic panels fitted above or in the side of the structure so that a strong corporate image can be created. The MR series is available in the following standard heights of 48, 60, 72 and 84 inches (1219, 1524, 1829 and 2134 mm).

Basic Use


MR Series Versa-Module Series are designed to hold and display literature and other media for viewing or distributing.

Quality: designed and engineered to the highest standards. Available as anodized in natural aluminum finish, color anodized or powder coated.

Style and Affordability: the perfect solution to enhance brands with an impressive, durable and yet, affordable display system.

Versatility: interchangeable components permit the design of structures for use in various industries, not just displays. The modular system offers endless possibilities adaptable to any space, environment or requirements.

Flexibility and Modularity: a quick and efficient way to design and build attractive display stands, merchandising units, sale kiosks, signage or information posts at trade show booths, etc.

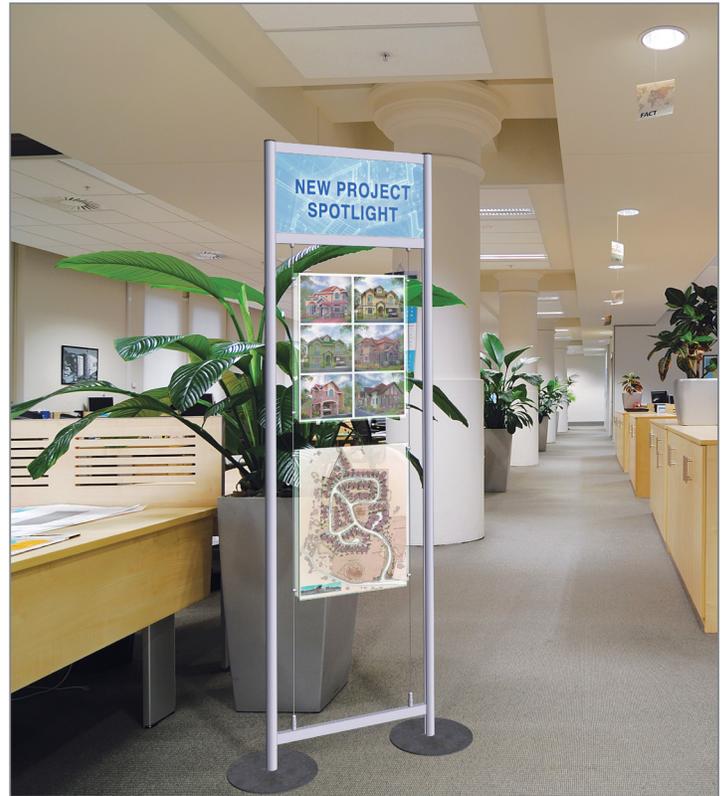

Easy and Quick Assembly: the system is engineered for a speed and easy assembly to minimize installation costs.

Infinite Design: the wide range of aluminum extrusions and components offers limitless expression to both the designer's and craftsman's creativities.

Applications

These information post systems are very versatile and flexible. Interchangeable components permit the design of structures for use in various industries, not just displays, adaptable to any space, environment or safety requirements.

Composition and Materials

All aluminum components are manufactured of high-grade aluminum alloy by method of cold extrusion. They have a high strength, close tolerance, and good surface finish.

All stands come with a metal base, cable and rod fittings in satin chrome finish as standard, other finishes on request. All accessories are made of high-quality clear acrylic.

Colors, Finishes


Standard finish is Clear Satin Anodized. Color powder coating is also available upon request.

Models

Available in single-sided and double-sided floor-standing vertical displays with base. See Table 1.


Table 1—Versa-Module Models

KFMR-003




Dimensions (W x H)	27¼ x 72" (692 x 1829 mm)	
Weight	22.7 lbs. (10.3 kg)	
Hardware	<ul style="list-style-type: none"> ■ MR1100/72" (1829 mm)/D1: Vertical extrusion (2 ea.) ■ PH1035/14" (356 mm)/L/C: Horizontal extrusion (3 ea.) ■ 311 01: End cap for MR1100 (2 ea.) ■ 652 108: Insert block (2 ea.) 	<ul style="list-style-type: none"> ■ 625 RND12UNI: 12" (305 mm) dia. round floor base (2 ea.) ■ PA8: Toggle fixing for cables (4 ea.) ■ CA4: Cable suspension Kit (2 ea.) ■ CG03: Panel support single (12 ea.)
Accessories	<ul style="list-style-type: none"> ■ 114ASP-1114LG: Logo panel (1 ea.); size: 14 ½ x 11¼" (368 x 286 mm) ■ 18EAAP-8511P: Acrylic poster holder (2 ea.); insert size: 8½ x 11" (216 x 279 mm) 	
Graphics	■ —	

KFMR-004




Dimensions (W x H)	27¼ x 72" (692 x 1829 mm)	
Weight	21.8 lbs. (9.9 kg)	
Hardware	<ul style="list-style-type: none"> ■ MR1100/72" (1829 mm)/D1: Vertical extrusion (2 ea.) ■ PH1035/14" (356 mm)/L/C: Horizontal extrusion (2 ea.) ■ 311 01: End cap for MR1100 (2 ea.) ■ 652 108: Insert block (2 ea.) 	<ul style="list-style-type: none"> ■ 625 RND12UNI: 12" (305 mm) dia. round floor base (2 ea.) ■ PA8: Toggle fixing for cables (4 ea.) ■ CA4: Cable suspension Kit (2 ea.) ■ CG03: Panel support single (12 ea.)
Accessories	<ul style="list-style-type: none"> ■ 18EAAP-8511P: Acrylic poster holder (3 ea.); insert size: 8½ x 11" (216 x 279 mm) 	
Graphics	—	

KFMR-008



Dimensions (W x H)	27¼ x 72" (692 x 1829 mm)	
Weight	25.6 lbs. (11.6 kg)	
Hardware	<ul style="list-style-type: none"> ■ MR1100/72" (1829 mm)/D1: Vertical extrusion (2 ea.) ■ PH1035/14" (356 mm)/L/C: Horizontal extrusion (3 ea.) ■ 311 01: End cap for MR1100 (2 ea.) ■ 652 108: Insert block (2 ea.) 	<ul style="list-style-type: none"> ■ 625 RND12UNI: 12" (305 mm) dia. round floor base (2 ea.) ■ PA8: Toggle fixing for cables (4 ea.) ■ CA4: Cable suspension Kit (2 ea.) ■ CG01: Panel support single (12 ea.)
Accessories	<ul style="list-style-type: none"> ■ 114ASP-1114LG: Logo panel (1 ea.); size: 14½ x 11¼" (368 x 286 mm) ■ 18EAAP-8511L: Acrylic poster holder (2 ea.) Insert Size: 11 x 8½" (279 x 216 mm) ■ 18ALD-2-3585P/12: Acrylic dispenser (1 or 2 ea.); insert size: 3½ x 8½" (89 x 216 mm) (tri-fold) 	
Graphics	■ —	

KFMR-014



Dimensions (W x H)	29½ x 72" (749 x 1829 mm)	
Weight	23 lbs. (10.4 kg)	
Hardware	<ul style="list-style-type: none"> ■ MR1100/72" (1829 mm)/D1: Vertical extrusion (2 ea.) ■ PH1035/14" (356 mm)/L/C: Horizontal extrusion (2ea.) ■ 311 01: End cap for MR1100 (2 ea.) ■ 652 108: Insert block (2 ea.) 	<ul style="list-style-type: none"> ■ 625 RND12UNI: 12" (305 mm) dia. round floor base (2 ea.) ■ PA8: Toggle fixing for cables (4 ea.) ■ CA4: Cable suspension Kit (2 ea.) ■ CG01: Panel support single (12 ea.)
Accessories	<ul style="list-style-type: none"> ■ 18EAAP-1117P: Acrylic poster holder (2 ea.); insert size: 11 x 17" (279 x 432 mm) 	
Graphics	—	


KFMR-017



Dimensions (W x H)	34½ x 72" (876 x 1829 mm)	
Weight	22.4 lbs. (12.4 kg)	
Hardware	<ul style="list-style-type: none"> ■ MR1100/72" (1829 mm)/D1: Vertical extrusion (2 ea.) ■ PH1035/14" (356 mm)/L/C: Horizontal extrusion (3 ea.) ■ 311 01: End cap for MR1100 (2 ea.) ■ 652 108: Insert block (2 ea.) 	<ul style="list-style-type: none"> ■ 625 RND12UNI: 12" (305 mm) dia. round floor base (2 ea.) ■ PA8: Toggle fixing for cables (4 ea.) ■ CA4: Cable suspension Kit (2 ea.) ■ CG01: Panel support single (8 ea.)
Accessories	<ul style="list-style-type: none"> ■ 14ASP-1121LG: Logo panel (1 ea.); size: 21½ x 11¼" (546 x 286 mm) ■ 18EAAP-1620P: Acrylic poster holder (1 ea.); insert size: 16 x 20" (406 x 508 mm) ■ 18ALD-3-3585P/17: Acrylic dispenser (1 or 2 ea.); insert size: 3½ x 8½" (89 x 216 mm) (tri-fold) 	
Graphics	■ Full-color digital printed logo/sign single or double sided	


Table 1—Versa-Module Models

KFMR-018



Dimensions (W × H)	34½ × 84" (876 × 2134 mm)	
Weight	29 lbs. (13.2 kg)	
Hardware	<ul style="list-style-type: none"> ■ MR1100/84" (2134 mm)/D1: Vertical extrusion (2 ea.) ■ PH1035/14" (533 mm)/L/C: Horizontal extrusion (3 ea.) ■ 311 01: End cap for MR1100 (2 ea.) ■ 652 108: Insert block (2 ea.) 	<ul style="list-style-type: none"> ■ 625 RND12UNI: 12" (305 mm) dia. round floor base (2 ea.) ■ PA8: Toggle fixing for cables (4 ea.) ■ CA4: Cable suspension Kit (2 ea.) ■ CG03: Panel support single (8 ea.)
Accessories	<ul style="list-style-type: none"> ■ 14ASP-1121LG: Logo panel (1 ea.); size: 21½ x 11¼" (546 × 286 mm) ■ 18EAAP-1620P: Acrylic poster holder (2 ea.); insert size: 16 × 20" (406 × 508 mm) 	
Graphics	<ul style="list-style-type: none"> ■ Full-color digital printed logo/sign single or double sided 	

KFMR-024




Dimensions (W × H)	34½ × 84" (876 × 2134 mm)	
Weight	22 lbs. (12.2 kg)	
Hardware	<ul style="list-style-type: none"> ■ MR1100/84" (2134 mm)/D1: Vertical extrusion (2 ea.) ■ PH1035/14" (356 mm)/L/C: Horizontal extrusion (3 ea.) ■ 311 01: End cap for MR1100 (2 ea.) ■ 652 108: Insert block (2 ea.) 	<ul style="list-style-type: none"> ■ 625 RND12UNI: 12" (305 mm) dia. round floor base (2 ea.) ■ PA8: Toggle fixing for cables (4 ea.) ■ CA4: Cable suspension Kit (2 ea.) ■ CG03: Panel support single (12 ea.) ■ CG04: Panel support single (6 ea.)
Accessories	<ul style="list-style-type: none"> ■ 14ASP-1121LG: Logo panel (1 ea.); size: 21½ x 11¼" (546 × 286 mm) ■ 18EAAP-8511P: Acrylic poster holder (6 ea.); insert size: 8½ × 11" (216 × 279 mm) 	
Graphics	<ul style="list-style-type: none"> ■ Full-color digital printed logo/sign single or double sided 	

KFMR-025




Dimensions (W × H)	34½ × 84" (876 × 2134 mm)	
Weight	26.4 lbs. (12 kg)	
Hardware	<ul style="list-style-type: none"> ■ MR1100/84" (2134 mm)/D1: Vertical extrusion (2 ea.) ■ PH1035/14" (356 mm)/L/C: Horizontal extrusion (2 ea.) ■ 311 01: End cap for MR1100 (2 ea.) ■ 652 108: Insert block (2 ea.) 	<ul style="list-style-type: none"> ■ 625 RND12UNI: 12" (305 mm) dia. round floor base (2 ea.) ■ PA8: Toggle fixing for cables (4 ea.) ■ CA4: Cable suspension Kit (2 ea.) ■ CG03: Panel support single (16 ea.) ■ CG04: Panel support single (8 ea.)
Accessories	<ul style="list-style-type: none"> ■ 18EAAP-8511P: Acrylic poster holder (8 ea.); insert size: 8½ × 11" (216 × 279 mm) 	
Graphics	—	

KFMR-038



Dimensions (W × H)	37 × 84" (940 × 2134 mm)	
Weight	35.9 lbs. (16.3 kg)	
Hardware	<ul style="list-style-type: none"> ■ MR1100/84" (2134 mm)/D1: Vertical extrusion (2 ea.) ■ PH1035/23.5" (597 mm)/L/C: Horizontal extrusion (3 ea.) ■ 311 01: End Cap for MR1100 (2 ea.) 	<ul style="list-style-type: none"> ■ 652 108: Insert block (2 ea.) ■ 625 RND12UNI: 12" (305 mm) Dia. round floor base (2 ea.) ■ ACS-806: 72" (1829 mm) Clear gasket (3 ea.)
Accessories	<ul style="list-style-type: none"> ■ 14ASP-2324LG: Logo panel (1 ea.); size: 24 × 23¼" (610 × 597 mm) ■ 14PVC-2448GR: Graphic panel/PVC (1 ea.); panel size: 24 × 48" (610 × 1220 mm) 	
Graphics	<ul style="list-style-type: none"> ■ Full-color digital printed logo/sign single or double sided 	

KFMR-040



Dimensions (W × H)	37 × 84" (940 × 2134 mm)	
Weight	32.4 lbs. (14.7 kg)	
Hardware	<ul style="list-style-type: none"> ■ MR1100/84" (2134 mm)/D1: Vertical extrusion (2 ea.) ■ PH1035/23.5" (597 mm)/L/C: Horizontal extrusion (2 ea.) ■ 311 01: End Cap for MR1100 (2 ea.) 	<ul style="list-style-type: none"> ■ 652 108: Insert block (2 ea.) ■ 625 RND12UNI: 12" (305 mm) Dia. round floor base (2 ea.) ■ ACS-806: 72" (1829 mm) Clear gasket (3 ea.)
Accessories	<ul style="list-style-type: none"> ■ 14PVC-2472GR: Graphic panel/PVC (1 ea.); panel size: 24 × 72" (610 × 1829 mm) 	
Graphics	<ul style="list-style-type: none"> ■ Full-color digital printed logo/sign single or double sided 	

Nova Display, Inc.



Components

These high versatile modular information post systems are created specially to offer freedom and flexibility in design. They offer a perfect solution for exhibitions, trade shows, seminars, shopping centers, showrooms, conventions, etc.

Hardware Options

- CA4 Cable Kit for standard installations
- CQQ Cable Kit for quick fit toggle installations

Accessories

A full line of accessories are also available to give each assembly the features needed. Extrusions have at least one channel on the full length of the profile. This enables insertion of panels and other accessories, such as connectors, hinges, cable and rod fittings, wall mounts, etc.

Easy Access Acrylic Pockets

These pockets are a quick and easy way to create high impact poster displays, simple and inexpensive, single or double sided. They are all designed to take various size posters, photos, graphic

art, and documents, and they are available to suit any display requirement. Nova Display also specializes in custom work and welcomes any of design variations. For special orders under time constraints, Nova Display is uniquely capable of providing fast turnaround when necessary.

Hook-on Acrylic Pockets

These pockets are an alternative to traditional slat-wall system. This easy to use system allows customer to create stylish interior displays for all types of information and then can be changed within a few minutes.

Acrylic Leaflet Dispensers

Nova Display offers well-designed, prefabricated and custom fabricated leaflet dispensers, in many styles and sizes. They are manufactured from exceptional quality, clear acrylic. Model types include reclined leaflet dispensers and angled/shelf dispensers.

Custom dispensers are available, contact Nova Display.

Benefits

- Longevity
- Versatility
- Affordability
- Fully modular and customizable to your needs
- Quality: designed and engineered to the highest standards
- Infinite design
- Re-configurable
- Easy, quick assembly

Product Limitations

The systems are for interior use only.

4. Technical Data

Sustainment

All information post systems are fabricated from non-ferrous recycling metals such as aluminum, stainless steel, brass, bronze and copper alloys. With close to 100 percent recyclable content, these metals can be repeatedly recycled back into similar or other products with no loss of quality, as reprocessing does not damage their molecular structure. Nova Display understands the importance of environmental well-being and will take every step to contribute to more environmentally friendly surroundings.

Fire Performance

Modular display components and parts are produced from aluminum which has a melting point of over 1220 degrees F, (660 degrees C), so none are considered to be a fire hazard.

Precautions (Performance, Safety)

Aluminum components are characterized by their lightness, strength, corrosion resistance and durability. However, care should be employed when handling and cleaning aluminum to avoid staining and damage.

Weather/Ambient Consideration

The systems are for interior use only.

Delivery, Storage and Handling**Delivery**

Aluminum components are supplied with a protected surface using strippable plastic, foam, or paper coating. Components are delivered packaged for long haul transit.

Storage

Aluminum should be stored indoors, in a clean, dust- and contaminant-free environment, in dry enclosures with adequate ventilation to avoid condensation, and not be in contact with any other materials.

Handling

Protect aluminum components from damage during handling, movement, and installation. To avoid damage to the surface of aluminum some care is needed in handling: avoid scraping against hard or sharp surfaces; do not drag or throw components on their surfaces; use soft slings when lifting heavy components.

Maintenance

Clean regularly to remove any dirt build up. If dirt build-up is left for an extended period, grime may cause staining. To clean: use plain water with mild soap or detergent or non-etching chemical cleaner.

Preparations

1. Read instruction sheet carefully before starting assembly.
1. Separate all parts and check quantities.
1. Account for all parts before discarding any packaging materials.

Methods**R-003, KFMR-008, KFMR-017, KFMR-024**

1. Attached the vertical extrusions to the floor bases using insert blocks with set screws and a hex-key.
2. Position the top and middle horizontal extrusions to the vertical extrusions at the appropriate height and lock the attached CBX connectors into lace with a hex-key.
3. Insert the info/logo panel from the top and adjust the horizontal extrusions for the appropriate height and lock them in place.
4. Position the top and middle horizontal extrusions at the appropriate height and lock the attached CBX connectors into lace with a hex-key.
5. Position the panel supports symmetrically on the cables using a hex-key and affix the acrylic poster and literature holders.
6. Install cable suspension kits.

KFMR-004, KFMR-008, KFMR-014, KFMR-018, KFMR-025

1. Attached the vertical extrusions to the floor bases using insert blocks with set screws and a hex-key.
2. Position the top and bottom horizontal extrusions at the appropriate height and lock the attached CBX connectors into lace with a hex-key.
3. Install cable suspension kits.
4. Position the panel supports symmetrically on the cables using a hex-key and affix the acrylic poster and literature holders.
5. Attach end caps to the tops of the vertical extrusions.

Tip: Consult CA4 Cable Kit and CQQ Cable Kit installation guides for cable assemble. Also, consult CG01 and CG03 panel support installation guides for support assemble.

KFMR-038

1. Attached the vertical extrusions to the floor bases using insert blocks with set screws and a hex-key.
2. Position the bottom horizontal extrusions at the appropriate height and lock the attached CBX connectors into lace with a hex-key.
3. Slide the acrylic panel into the channel of the vertical extrusion and the bottom horizontal extrusion.
4. Position the middle horizontal extrusions at the appropriate height and lock the attached CBX connectors into lace with a hex-key.
5. Position the sign panel into the channel of the vertical extrusion and middle horizontal extrusion
6. Position the middle horizontal extrusions at the appropriate height and lock the attached CBX connectors into lace with a hex-key.
7. Attach end caps to the tops of the vertical extrusions.

KFMR-040

1. Attached the vertical extrusions to the floor bases using insert blocks with set screws and a hex-key.
2. Position the bottom horizontal extrusions at the appropriate height and lock the attached CBX connectors into lace with a hex-key.
3. Slide the bottom acrylic panel into the channel of the vertical extrusion and the bottom horizontal extrusion.
4. Position the tophorizontal extrusions at the appropriate height and lock the attached CBX connectors into lace with a hex-key.
5. Attach end caps to the tops of the vertical extrusions.
6. Availability and Cost

Availability

Most of the standard components are stocked and delivered in 2–15 business days. Lead time on non-standard items, special item, or customized product may vary from up to 10–12 weeks.

Cost

Pricing for most of our products can be found [here](#).

7. Warranty

Nova Display Systems, Inc., manufactures its hardware products from parts and components that are new or equivalent to new in accordance with industry-standard practices. Nova Display warrants that the hardware products it manufactures will be free from defects in materials and workmanship. The warranty term is one year beginning on the date of purchasing, or the date the merchandise is received by the customer.

This warranty does not cover damage due to external causes, including accident, abuse, misuse, failure to follow installation requirements and problems caused by use of parts and components not supplied by Nova Display. Any unauthorized opening of the merchandise enclosure(s) will void this warranty in its entirety as it pertains to that item.

Nova Display will replace products returned to Nova Display facility. To request warranty service, you must contact Nova Display within the warranty period. If warranty service is required, Nova Display will issue a Return Merchandise Authorization Number (RMA number). Ship the products back to Nova Display in their original or equivalent packaging, prepay shipping charges and insure the shipment or accept the risk of loss or damage during shipment. Nova Display will ship the repaired or replacement products back, freight prepaid, if the address is in the U.S. Shipments to other locations will be made freight collect. Nova Display may, but is not required to, ship replacement components prior to receiving the returned merchandise. If so, and if the return merchandise is not received in good condition (less the repair issue for which the RMA was issued) the customer will be responsible for paying the full list price of the merchandise that was sent as a replacement.

Nova Display owns all replaced parts. Nova Display uses new and reconditioned parts made by various manufacturers in performing warranty repairs and building replacement products. If Nova Display repairs or replaces a product, its warranty term is not extended.

This warranty gives customers specific legal rights, and they may also have other rights, which vary from state to state (or jurisdiction to jurisdiction).

Nova Display's responsibility for malfunctions and defects in hardware is limited to repair and replacement as set forth in this warranty statement. Suitability and fitness for a particular purpose are expressly disclaimed.

All express and implied warranties for the product, including but not limited to any implied warranties of and conditions of merchantability, are limited in duration to the warranty period set forth above and no warranties, whether express or implied, will apply after such period. Some states (or jurisdictions) do

not. Allow limitations on how long an implied warranty lasts, so the above limitation may not apply.

For a downloadable .pdf file of warranty policies, click [here](#).

8. Maintenance

No maintenance is required. Download installation instructions [here](#) and follow manufacturer instructions. Inspect cables and fittings regularly for visible damage, wear, elongation, kinking, crushing, corrosion, etc. No product can keep operating at its rated capacity indefinitely. Periodic inspections help determine when to replace a cable to eliminate extensive damage or reduce hazards.

9. Technical Services**Design Services/Creative Design and Project Development**

Nova Display Systems, Inc., specializes in design, planning, project management and assists in specifying any part of the project and helps develop the client's idea from prototype to production.

Nova Display works with a highly specialized team of interior designers, decorators, contractors and other service providers who have the training and expertise to manage all project details. Contact Nova Display's in-house design team or request information about its Preferred Design Partner Program of certified architects and design companies nearby.

To customize a display kit, please provide a short description, or graphical attachment. Nova Displays will respond quickly with recommendations, price quotes and additional comments regarding design and fabrication. All custom orders are subject to a minimum order requirement.

For more information, please contact Nova Display's or visit [here](#).

Installation Services

For installation assistance, click Installation Instructions for most Nova Display systems or individual components. Installation services are also available through Nova Display's Preferred Installer Program of certified contractors located nearby. Contact Nova Display Systems, Inc., for any questions not available through these resources.

10. Filing Systems

- CMD
- Additional product information is available from the manufacturer upon request ↪