


# Installation Guidelines


**NOVADISPLAY®**  
INNOVATIVE DISPLAY SOLUTIONS

## 1.5mm Cable Display Systems

800.753.9688 • www.novadisplay.com

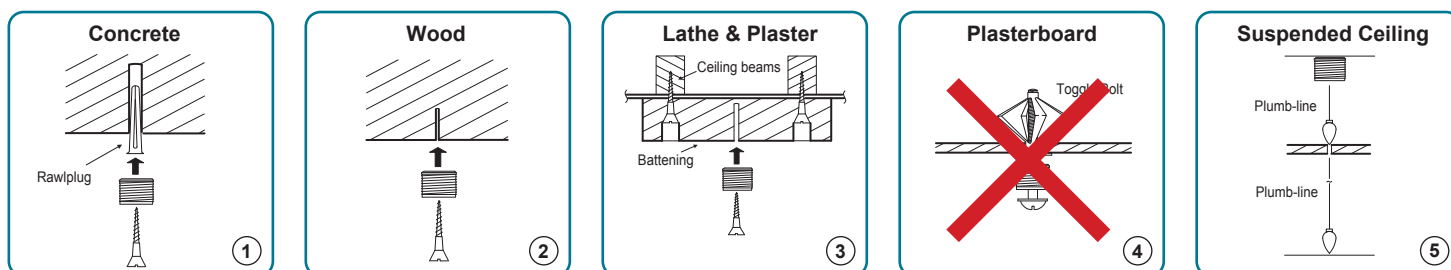

**\*\*\* DO NOT INSTALL INTO PLASTERBOARD (DRYWALL) CEILINGS OR WALLS IF YOUR APPLICATION INCLUDES GLASS SHELVING OR OTHER HEAVY ITEMS.**

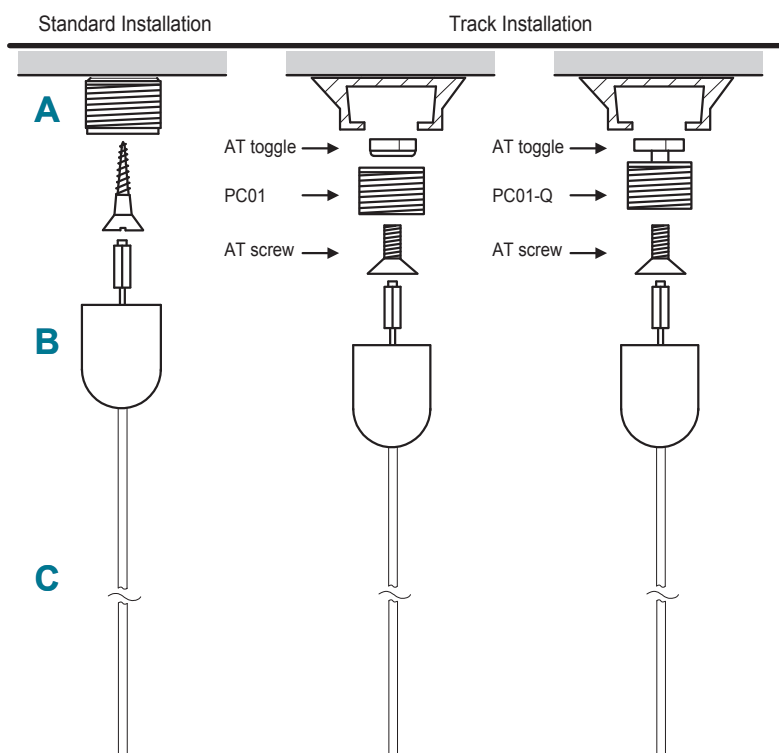

### Top (C2) - Cable Installation

**IMPORTANT:** It is essential to check that the top ceiling fixings are strong enough to take the weight of the items being displayed, while allowing for the tension in the cables.

- 1) Fix fitting (A) to ceiling:
  - for wooden ceilings use a wood screw.
  - for cavity ceilings use a spring toggle bolt.
  - for solid ceilings use a rawl plug and screw.
- 2) For Channel Fixing use Quick Fit Toggle (PC01-Q) or Toggle (AT)
- 3) Screw fitting (B) to fitting (A).
- 4) To complete the application attach to cable the panel, or shelf fittings at desired location.

**NOTE:** It is important to check the strength of the top fixing(s). NOVADISPLAY® takes no responsibility for incorrect installation. This responsibility rests with the installer.

Cables are not supplied with fixing screws.

