

ONLINE CATALOG

Freestanding Displays

Features & Components



CONTACT INFORMATION

- To Order Products, Check Status of Your Order or Track Your Package... call toll free 800-753-9688
- Send Your Inquires, Questions or Comments to Info@novadisplay.com (For assistance with general questions or actual display projects, please fax or e-mail us a short description and a graphical attachment. For best results, please send us a rough sketch or a project lay-out with dimensions and any special details. Using your drawing, we will generate a quote and specification sheet for the parts that lists the pricing, availability, delivery time, etc. You will receive a copy for review before ordering)
- For more information on our products and services, including pricing, technical information, and installation instructions visit our website at www.novadisplay.com
- You are also invited to visit our Online Store at www.store.novadisplay.com, where you will find various concept ideas and a comprehensive range of standard "Display Kits".

Info-Post, Free-Style, and Flexi-Frame Display Units

Info-Post Displays - create an instant presentation to display signs, posters, leaflets and banners. Units can be positioned exactly where required and moved whenever necessary. All information and accessories can be easy and quick changed. Units are supplied packed flat and can be assembled in minutes. Includes one 78" aluminum upright, 15" diameter base, and various mounting fittings for supporting acrylic frames, dispensers, signs or banners. Perfect for use in:

- Reception areas for company information or as a directory sign.
- Shop or store windows.
- Near a sales counter or customer service desk on exhibition stands.





Freestyle Displays - individual frames designed to display posters, signage, leaflet dispensers, shelving, banner displays and much more. Suspended cables are fixed into an attractive aluminum profile system that gives maximum flexibility to create unique presentations. Circular base gives stability to the unit. Available in following standard widths: 24", 30", 36", and 48". Cables are quick and easy to install and can be changed to meet new requirements.


Units can be designed for multiple outlets that require a consistent display in all their branches, and that can be easily assembled without any permanent fixing. The clean crisp presentation allows the customer to view the merchandising and the branding of the goods while still being able to see into the interior of the shop or into other departments.


Flexi-frame Displays - the most versatile, flexible, and innovative in design visual display systems. Suitable for a wide variety of interior design applications that hold graphic displays, signage, leaflet dispensers, flat and sloping shelving and much more. The frame can have logo panels fitted above and also in the side of the structure so that a strong corporate image can be created.

Individual frames are available in following standard widths: 24", 30", 36", and 48". All frames are lightweight satin silver aluminum and can be linked together with flexible hinges to form multi-sectional units. The suspended cables within the units allow total flexibility in designing. Profile have a slot to take cables or rods fitted with a quick toggle. The flexible hinges allow units to fold flat for easy storage and relocation. Flexi-frame displays are ideal for use in:

- Conference rooms and reception areas
- Malls and retail outlets
- Libraries and museums
- Banks and hotels
- Corporate offices
- Showrooms and exhibitions
- Airports






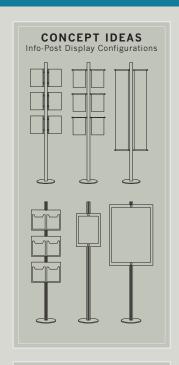

DISPLAY KITS

For easy ordering go to our Online Store at www.store.novadisplay.com, where you will find various concept ideas and a comprehensive range of standard "Display Kits".

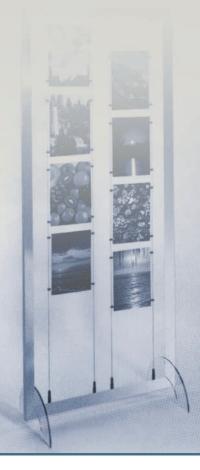



For more information on freestanding displays, including pricing, specifications, and installation instructions visit our website at www.novadisplay.com

Vertical Extrusions

VERTICAL EXTRUSION (UPRIGHTS) Single Channel Opening

- 49.6mm (1-15/16") dia. round profile.
 8mm (5/16") channel width/depth.
 Available in 72 and 78 inches lengths.
- Compatibility with horizontal extrusions. PH1005 PH1038

TR1100/78/L Clear Anodized

TR1100/72/L Clear Anodized

276



VERTICAL EXTRUSION (UPRIGHTS) Double Channel Opening

* Standard uprights for freestyle display frames

- 49.6mm (1-15/16") dia. round profile.
 8mm (5/16") channel width/depth.
 Available in 72 and 78 inches lengths.
- Compatibility with horizontal extrusions: PH1005, PH1038. TR1220/78/L Clear Anodized

TR1220/72/L Clear Anodized * Standard uprights for freestyle display frames.





VERTICAL EXTRUSION (UPRIGHTS) Channel Opening on Four Sides

- 49.6mm (1-15/16") dia. round profile.
 8mm (5/16") channel width/depth.
 4wailable in /2 and 78 inches lengths.
 Compatibility with horizontal extrusions: PH1005, PH1038.

TR1400/78/L Clear Anodized

TR1400/72/L Clear Anodized

* Standard uprights for freestyle display frames





VERTICAL EXTRUSION (UPRIGHTS) Single Channel Opening

- 38.1mm (1-1/2") dia. round profile.
- 8mm (5/16") channel width/depth.
 Available in 48 and 60 inches lengths.
 Compatibility with horizontal extrusions: PH1028, PH1035

MR1100/64/L Clear Anodized

MR1100/48/L Clear Anodized





VERTICAL EXTRUSION (UPRIGHTS) Double Channel Opening

- 38.1mm (1-1/2") dia. round profile.
- 8mm (5/16") channel width/depth.
 Available in 48 and 60 inches lengths.
 Compatibility with horizontal extrusions: PH1028, PH1035

MR1220/64/L Clear Anodized

MR1220/48/L Clear Anodized

* Standard uprights for totem display frames.

280

VERTICAL EXTRUSION (UPRIGHTS) Channel Opening on Four Sides

- 38.1mm (1-1/2") dia. round profile.
 8mm (5/16") channel width/depth.
 Available in 48 and 60 inches lengths.
- Compatibility with horizontal extrusions:

PH1028, PH1035

MR1400/64/L Clear Anodized MR1400/48/L Clear Anodized

* Standard uprights for totem display frames.

281

VERTICAL EXTRUSION (UPRIGHTS) Channel Opening on Three Sides

- 38.1mm (1-1/2") dia. round profile.
 8mm (5/16") channel width/depth.
 Available in 48 and 60 inches lengths.
- Compatibility with horizontal extrusions. PH1028, PH1035

PX3033/64/L Clear Anodized PX3033/48/L Clear Anodized

* Standard uprights for totem display frames






Info-Post Units - enable vou to create new. fresh and exciting displays to attract your customers... again and again!

Info-Post Configurations

- units can be supplied in kit form or customized to suit your interior display requirements. Available in following standard configurations:
- **1.** Side mounted Easy Access Acrylic Pockets.
- 2. Hook-on Acrylic Pockets mounted on projecting rods.
- 3. Double width Easy Access Acrylic Pockets.
- **4.** Single or multi-pocket leaflet dispensers.
- **5.** Graphic display frames
- various formats.
- 6. Banner display mounted on projecting
















Channel Fixing - for for faster installation use quick fit toggles. Twist and lock your sign, panel or leaflet dispenser anywhere along the length of a channel.



Quick Fit Toggle... page 46




Toggle. See details on

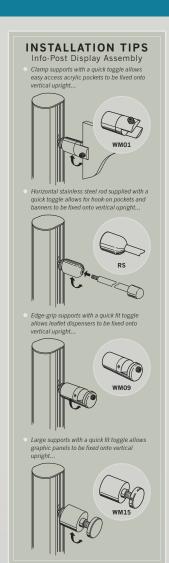



Vertical & Horizontal Extrusions

The quickest and easiest way to order free-style and flexi-frame units is to chose from available standard display kits. All kits are supplied complete with aluminum stand, bases, cable fittings, acrylic pockets, or acrylic dispensers. Units come flat packed and are supplied with self assembly instructions. The kits shown on this page are just a small selection of the many options available.





- Easy to change for constant refreshing of displays.
- Flexibility to mix various format poster frames, leaflet dispensers, signage, etc.
- Information delivery in key locations.
- Great aesthetic value and excellent focal point in the space.





VERTICAL EXTRUSION (UPRIGHTS) Channel Opening on Four Sides

- 32mm (1-1/4") square profile.
 8mm (5/16") channel width/depth.
 Available in 72, 60 and 48 inches lengths. Compatibility with horizontal extrusions:


PH1028, PH1035.		
PX4032/72/L	Clear Anodized	283
PX4032/64/L	Clear Anodized	203
PX4032/48/L	Clear Anodized	

VERTICAL EXTRUSION (UPRIGHTS) Channel Opening on Four Sides

- 26mm (1-1/16") square profile.
 8mm (5/16") channel width/depth.
 Available in 60 and 48 inches lengths.
 Compatibility with horizontal extrusions:

PH1028, PH1035.		
PX4026/64/L	Clear Anodized	284
PX4026/48/L	Clear Anodized	204

* Standard uprights for totem display frames.




VERTICAL EXTRUSION (UPRIGHTS) Double Channel Opening

- 45.5mm (1-13/16") x 19mm (3/4") profile.
- 8mm (5/16") channel width/depth.
 Available in 72 and 78 inches lengths.
- Compatibility with horizontal extrusions.
 PH1005. PH1038.

PH1005/78/L	Clear Anodized	285
PH1005/72/L	Clear Anodized	203
* Standard unrights for flow	i framo dioplano	






HORIZONTAL EXTRUSION Supplied with two CBX 42 Connectors

- 45.5mm (1-13/16") x 19mm (3/4") profile.
 8mm (5/16") channel width/depth.
 Available in 24, 36, 42 and 48 inches length

Available in 24, 36, 42 and 48 inches lengths.		
PH1005/24/L/C	Clear Anodized	286
PH1005/36/L/C	Clear Anodized	200
PH1005/42/L/C	Clear Anodized	









HORIZONTAL EXTRUSION Supplied with two CBX 35 Connectors

- 35mm (1-3/8") x 19mm (3/4") profile.
- 8mm (5/16") channel width/depth.
 Available in 24, 36, 42 and 48 inches

· Available III 24, 50,	42 and 40 menes lengt	1113.
PH1035/24/L/C	Clear Anodized	28
PH1035/36/L/C	Clear Anodized	28


PH1035/42/L/C Clear Anodized PH1035/48/L/C Clear Anodized



HORIZONTAL EXTRUSION Supplied with two CBX 35 Connectors

- 28mm (1-1/8") x 19mm (3/4") profile.
- 8mm (5/16") channel width/depth.

Available in 24, 36, 42 and 48 inches lengths.				
PH1028/24/L/C	Clear Anodized	289		
PH1028/36/L/C	Clear Anodized	203		
PH1028/42/L/C	Clear Anodized			
PH1028/48/L/C	Clear Anodized			

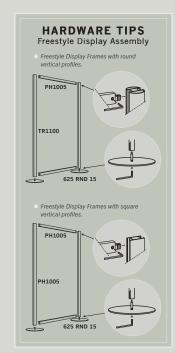





Floor Bases & Leveler Inserts

ROUND FLOOR BASE

- Available in 12" and 15" diameters.
 Base Thickness: 4.8 mm (3/16")
 Weight: 5.92 lbs and 9.25 lbs.
 Includes a stem and M10 screw.
- · Material: steel, black epoxy powder paint.

ACS 625 RND 15 Steel/Black

ACS 625 RND 12 Steel/Black






SQUARE FLOOR BASE

- Available in 12" and 15" widths. Base Thickness: 4.8 mm (3/16") Weight: 7.5 lbs and 11.7 lbs. Includes a stem and M10 screw. Material: steel, black epoxy powder paint.

- ACS 625 SQ 15 Steel/Black
- ACS 625 SQ 12 Steel/Black * For TR or PX vertical extrusions specify ref. 625 SQ 15 111 * For MR vertical extrusions specify ref. 625 SQ 12 108





Freestanding Display Units can be designed and fabricated to your individual requirements and to meet your marketing needs. Send us your specifications, sketches, ideas, and we will customize an existing piece or create something entirely new for you. All custom orders are subject to a minimum order requirement and may involve additional fees, please contact our sales representatives for more information.

TRIANGULAR FLOOR BASE

- Available in 15" width. Base Thickness: 4.8 mm (3/16") Weight: 7.29 lbs.
- Includes a stem and M10 screw.
- · Material: steel, black epoxy powder paint.

ACS 625 TRI	Steel/Black

* For TR or PX vertical extrusions specify ref. 625 TRI 111 * For MR vertical extrusions specify ref. 625 TRI 108



PEANUT FLOOR BASE

- Available in 15" width. Base Thickness: 4.8 mm (3/16") Weight: 3.58 lbs.
- Includes a stem and M10 screw.



292

FLOOR LEVELER INSERT SETS

• For use with TR, MR, and PX Vertical Extrusion

ACS 366 01	Use with TR Series	294
ACS 354 01	Use with MR Series	294
ACS 354 01	Use with PX4032	
ACS 387 01	Use with PX4026	

* Ref. 354 01 is also compatible with all PH extrusions



INSERT GLIDE

- For use with TR, MR, and PX Vertical Extrusion
- Material: Glide made of black plastic.
- ACS 508 01 Use with TR Series ACS 530 01 Use with PH1005



ALUMINUM ADHESIVE END CAP

For use with TR, PX, and PH Extrusion.
Used for profile end finishing.

p		
ACS 383 01	Use with TR Series	296
ACS 311 01	Use with MR Series	250
ACS 375 01	Use with PH1005	
ACS 372 01	Use with PX4032	
ACS 336 01	Use with PX4026	
















Profile Connectors & Accessories





 Make an impact with your information. Use acrylic frames, logo panels, signage, leaflet dispensers, lighting and shelving.





PLASTIC END CAP

• FOI USE WILLI TR OF PA VEILICAL EXTRASION
Used for profile end finishing.
Color: Grav

ACS 388	Use with TR Series	207
ACS 398	Use with PX4032	291







For use with PH Horizontal Extrusion.
Used for profile end finishing.
Color: Gray

ACS 393	Use with PH1005	298
ACS 391	Use with PH1028	290





CBX CONNECTORS

- For connecting PH1005, PH1028, PH1035, PH1038 horizontal extrusion to any vertical
- extrusion.
 Use 5 mm Hex Key.

CBX 42	For PH1005/1038
CBX 35	For PH1028/1035





SMALL REVERSIBLE HINGE

- Includes two half hinges (one hinge milled for connecting to a vertical or horizontal extrusion), a hinge pin and related screws.
 Use 3mm Hex Key.

ACS 253 01	Use with PH1005	300
		300
Used for connecting flat p		





FLEXIBLE HINGE

Swivels up to 360° to form required angle.
Allows unit to fold flat for easy storage and

	transporting.				
7	ACS 144 45	Use with PH1005	301		
			301		
	* Used for connecting flat profile flexi-frames to create double or triple display configurations. * Requires PH1005/72/L/C Vertical Extrusion supplied with wo CBX Connectors. Please call for details.				



DOUBLE SIDED BRACKETS

- Available in two sizes: 150mm (6") and 300mm (12") cable/rod centers.
 Ideal for flat and sloping shelves, or acrylic cubes.


KMFB-15/SI	Silver	200
KMFB-30/SI	Silver	302




SINGLE SIDED BRACKETS

- Available in 50mm (2") projection.
 Supports cables/rods in front of frame.
 Ideal for graphic panels, leaflet dispensers or signage.
 Brackets fit on all PH series profiles.

KMFB1/SI	Silver	303				
		303				
* Order cables/rods separately.						

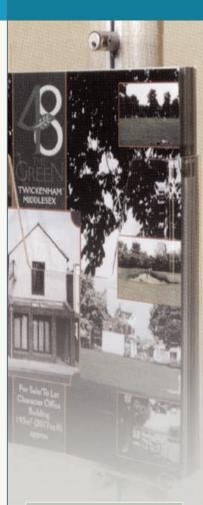

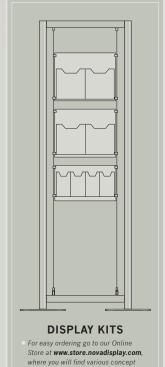

■ PRODUCT INFO:

ideas and a comprehensive range of standard "Display Kits".

Ordering, Payment & Return Policies

Ordering Policy

To start your order first, carefully review the product and service information on our web site, if you don't see exactly what you want, please contact us regarding availability, size, and quantity requirements for your project. Make sure you have decided on exactly what you need. Than, consult us on all your questions regarding our products, components and parts, because many of components can be easily confused. Contact us to receive a quote for your project. After placing an order, the customer receives via fax or e-mail a Customer Order Acknowledgment, which indicates in detail descriptions of items and pricing. Orders will not be processed without Nova Display, Inc. receiving a signed copy of said Customer Order Acknowledgment. Make sure to review and initial all areas. All changes to your orders of stock merchandise can be modified no later then 24 hours after receiving your order. We will call or fax you immediately should something change concerning your order.

Sample Policy

Nova Display, Inc. will provide samples for your testing and inspection. Most samples are supplied at 40% discounted cost (plus UPS Charges). If you need to order components for a prototype or fabrication of a prototype, please contact us for a quotation.

Payment Policy

All orders are shipped F.O.B Nova Display. We accept Visa, or Master Card, in addition to Money Orders, Cashier's Checks and Business/Personal Checks. For orders by phone, you may pre-pay your order via check or wire transfer. Orders prepaid with a check will be shipped within 24 hours of check clearance. New customers wishing to prepay an order totaling \$5,000 or more must allow 10 business days for their check to clear. This policy applies to personal, business, cashiers, and certified checks, as well as money orders.

Overseas customers may pay by Credit Card or Bank T/T at the time of shipment. We do not charge your credit card for any item until it is shipped, this doesn't apply to customized and non-standard items. All credit card orders are subject to credit verification and approval. For your protection, credit card orders shipped to an address other than your billing address may require additional verification.

Qualified businesses or organizations will be given Net 30 terms upon approved credit. In order to open an account, please provide a bank reference and three trade references. Customers with established credit are expected to pay NET within specific terms of their account, pre-established credit limits, and our standard Terms and Conditions, otherwise the line of credit will be discontinued.

All Custom Orders require a 50% Deposit before start of fabrication. Remainder due prior to shipping unless other terms have been determined by Nova Display, Inc. Credit Department.

All pricing and specifications are subject to change, without prior notice. Freight, handling and insurance will be added to your order. Please call for current pricing and availability. Send payments to: Nova Display, Inc., 1626 Piner Road, Santa Rosa, CA 94503

We also suggest you to use our automated ordering system when placing an order, or buying our products online. We accept electronic check payments via PayPal. It also allows you to make payments using VISA / Master Card / American Express. If you don't want to use our secure ordering system or are having problems using it call us toll free: 800-753-9688.

Quality Policy

All merchandise is produced to standard and commercial tolerances. Nova Display, Inc. warranties product to be free from defects in workmanship and material. When Nova Display has determined that a product is defective, it will be replaced. Nova Display liability is limited to the cost of the defective product. No other warranty is expressed or implied.

Shipping Policy

90% of orders on finished products are shipped out within 2-15 business days from our sales/distribution center. The custom made products or components which are not available in stock at the moment of ordering will be shipped in 2-8 weeks. Most orders are shipped via UPS or FedEx, unless otherwise specified. We offer express air and economical two day air service on most items in stock. For large orders, we'll ship freight collect by the most reliable and inexpensive carrier to your location.

Return Policy

Inspect all your shipment immediately upon arrival. If your order is not received in satisfactory condition, keep all packaging and notify us within (3) days of receipt. Stock merchandise in original, unopened packaging may be returned for refund within fifteen (15) days of receipt. Items must be in their original state (undamaged). Shipping and handling charges for returned items are non-refundable. All returns must be accompanied by the order statement. You may want to insure your return. We cannot be responsible for lost or misdirected returns. If you paid for your order by credit card, a credit will be issued and will appear on your billing statement. Returns must be insured for the invoiced value of the merchandise. Please note that custom merchandise is not returnable. A 15%-30% restocking fee will be charged on all returns. If you have any questions, ask your salesperson for details. Merchandise must be returned to: Nova Display, Inc., 1626 Piner Road., Santa Rosa, CA 95403-1908



"All you need to create high impact displays..."

Lobbies

Receptions

Showrooms

Windows

Corridors

Exhibitions

Museums

Galleries

Offices

Retail Outlets

Banks

Point-of-Sale

Airports

Shopping Malls

Sport Arenas

Hotels

Universities

Colleges

